

System sheet EP-ECB Plus

Description


Anti-slip (\pm R12) flooring based on solvent-free epoxy used for medium/heavy duty floors under wet conditions.

Application area's

- Workshops
- Industrial floors
- Warehouses
- Distribution centers
- Parking garages
- Car washes

Most important properties

- Smooth anti-slip structure
- Mechanical resistant
- For in- and outdoor use
- Low noise
- Very good cleanability

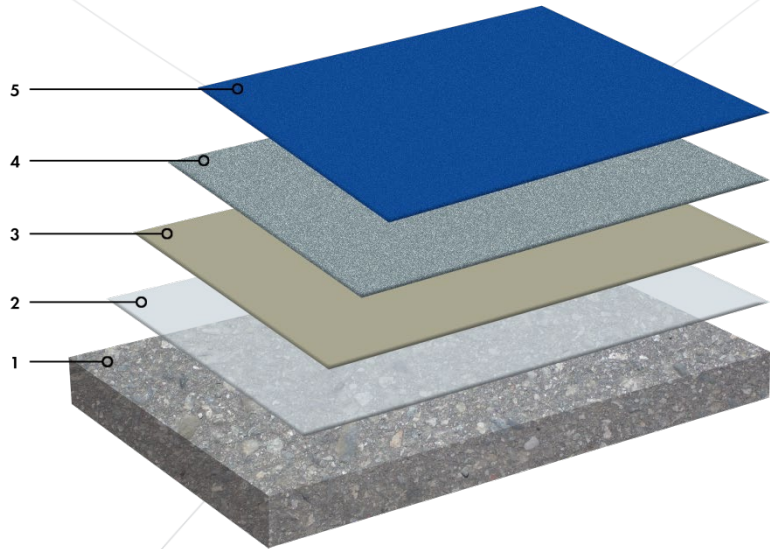

1. Pre-treat surface correctly
2. Rocapox Resin 100 (\pm 0,30 kg/m²/layer)
3. Rocapox Screed (\pm 1 kg/m²/layer)
4. Rocapox flooring SL-300 epoxy mortar layer 1:0,5 with fire-dried quartz sand 0,1-0,4 mm (\pm 1 kg/m²/layer)) and fully scatter wet layer immediately with fire-dried quartz sand 0,7 - 1,2 mm (\pm 6 kg/m²/layer)
5. Rocapox Flooring R (\pm 0,90 kg/m²/layer)

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future