

System sheet EP-GV 300 Base

Description


Self-leveling flooring system based on solvent-free epoxy.

Application area's

- Workshops
- Industrial floors
- Warehouses
- Distribution centers
- Parking garages
- Archives
- Cleanrooms

Most important properties

- High compressive strength
- Mechanical resistant
- Chemical resistant
- Seamless
- Liquid proof
- Hygienic

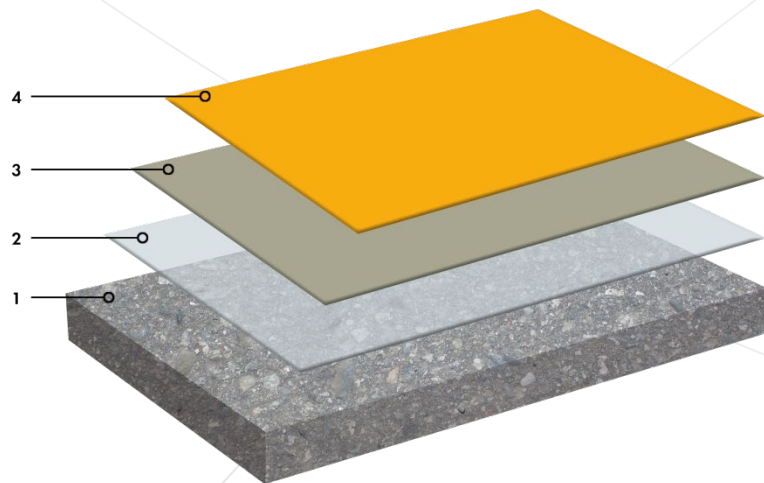

1. Pre-treat surface correctly
2. Rocopox Resin 100 ($\pm 0,30 \text{ kg/m}^2/\text{layer}$)
3. Rocopox Screed ($\pm 1 \text{ kg/m}^2/\text{layer}$)
4. Rocopox flooring SL-300 ($\pm 3 \text{ kg/m}^2/\text{layer}$)

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future