

System sheet EP-GV 300 Plus

Description


Self-leveling, coloured flooring system based on solvent-free epoxy with a wear resistant topcoat.

Application area's

- Archive rooms
- Cleanrooms
- Stores
- laboratories
- Schools
- Public buildings
- Restaurants

Most important properties

- High compressive strength
- Mechanical resistant
- Chemical resistant
- Seamless
- Liquid proof
- Hygienic

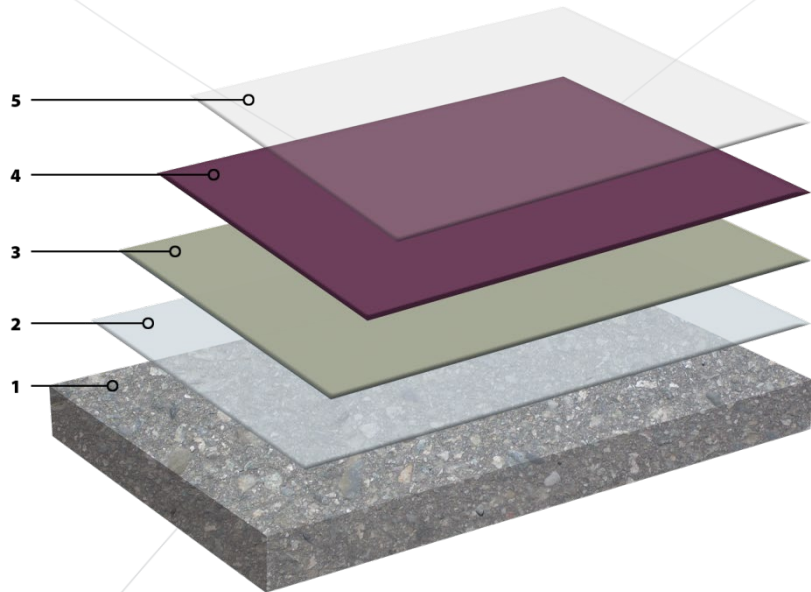

1. Pre-treat surfaces correctly
2. Rocapox Resin 100 ($\pm 0,30 \text{ kg/m}^2/\text{layer}$)
3. Rocapox Screed ($\pm 1 \text{ kg/m}^2/\text{layer}$)
4. Rocapox flooring SL-300 ($\pm 3 \text{ kg/m}^2/\text{layer}$)
5. Rocathaan Hardcoat 1-K PU-TR Satin ($\pm 0,10 \text{ kg/m}^2/\text{layer}$)

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future