

System sheet EP-VCA-R Plus

Description


Smooth anti-slip ($\pm R10$) flooring based on solvent-free epoxy used for medium duty floors.

Application area's

- Workshops
- Industrial floors
- Warehouses
- Distribution centers
- Parking garages

Most important properties

- Smooth anti-slip structure
- Mechanical resistant
- For in- and outdoor use
- Low noise
- Very good cleanability

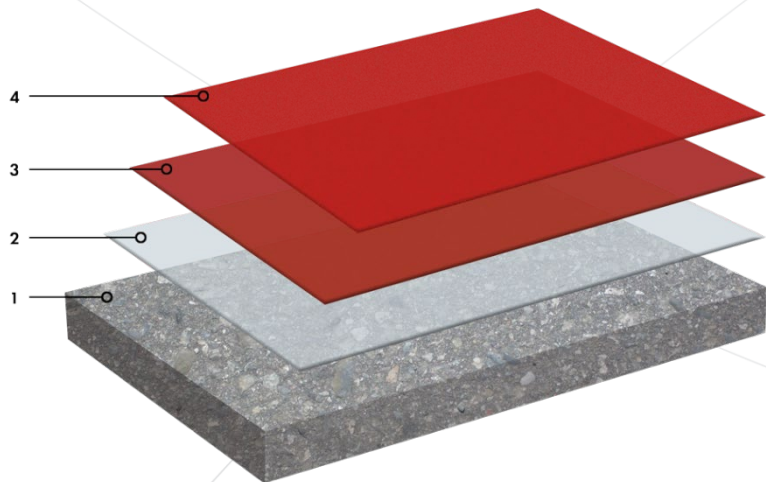

1. Pre-treat surface correctly
2. Rocopox Resin 100 ($\pm 0,30 \text{ kg/m}^2/\text{layer}$)
3. Rocopox Flooring R ($\pm 0,45 \text{ kg/m}^2/\text{layer}$)
4. Rocopox Flooring R with 3% silver sand ($\pm 0,35 \text{ kg/m}^2/\text{layer}$)

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future