

# System sheet EP-WDA Base

## Description


Smooth flooring based on waterborne epoxy for medium duty floors.

## Application area's

- Workshops
- Industrial floors
- Warehouses
- Distribution centers
- Staircases

## Most important properties

- Vapor-open
- Not saponifiable
- Mechanical resistant
- UV-resistant
- For in- and outdoor use

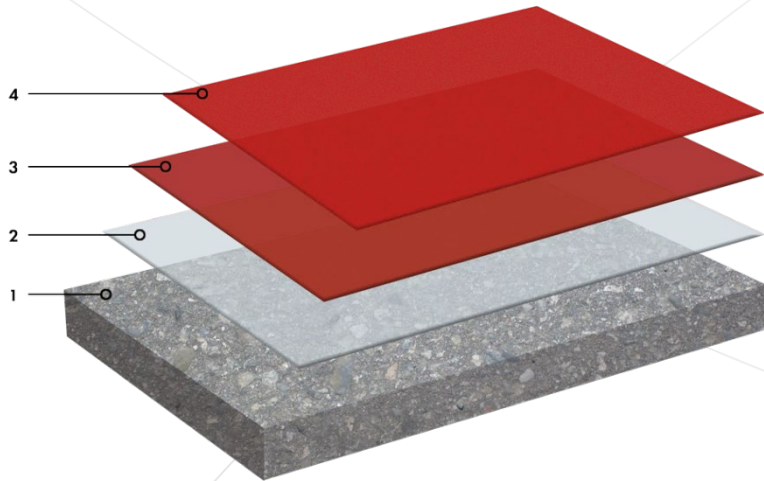

1. Pre-treat surface correctly
2. Rocapox Primer WD-500 ( $\pm 0,25 \text{ kg/m}^2/\text{layer}$ )
3. Rocapox Floor Coating WD-600 with a consumption of ( $\pm 0,25 \text{ kg/m}^2/\text{layer}$ )
4. Rocapox Floor Coating WD-600 ( $\pm 0,25 \text{ kg/m}^2/\text{layer}$ )

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
www.prokol.nl • info@prokol.nl

**Liquid synthetic materials for a sustainable future**