

# System sheet **EP-WDA LB**

## Description


Smooth flooring based on waterborne epoxy for light duty floors.

## Application area's

- Stores
- Showrooms
- Archive rooms
- Offices

## Most important properties

- Smooth finish
- Vapor-open
- Not saponifiable
- Mechanical resistant
- UV-resistant
- For in- and outdoor use

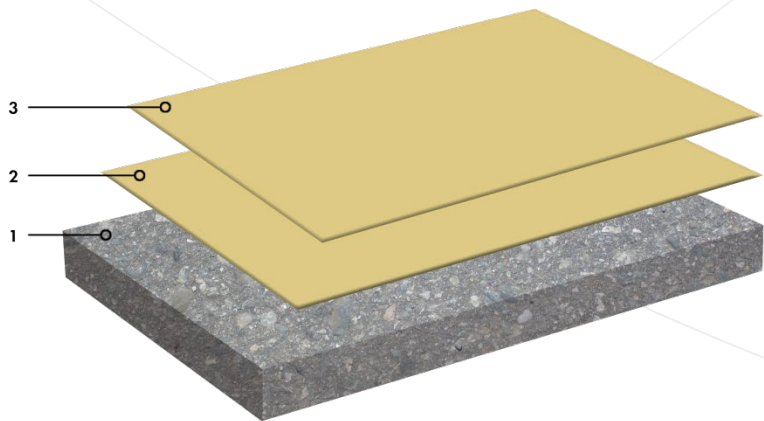

### 1. Pre-treat surface correctly

### 2. Rocapox Floor Coating WD-600 5% diluted with the use of demineralized water ( $\pm 0,25 \text{ kg/m}^2/\text{layer}$ )

### 3. Rocapox Floor Coating WD-600 ( $\pm 0,30 \text{ kg/m}^2/\text{layer}$ )

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
[www.prokol.nl](http://www.prokol.nl) • [info@prokol.nl](mailto:info@prokol.nl)

**Liquid synthetic materials for a sustainable future**