

System sheet EP-WDA Plus

Description


Anti-slip (\pm R11) flooring based on waterborne epoxy for medium duty floors.

Application area's

- Parking garages
- Workshops
- Industrial floors
- Warehouses
- Distribution centers
- Staircases

Most important properties

- Smooth finish
- Vapor-open
- Not saponifiable
- Mechanical resistant
- UV-resistant
- For in- and outdoor use
- Meets the OS 8 standards

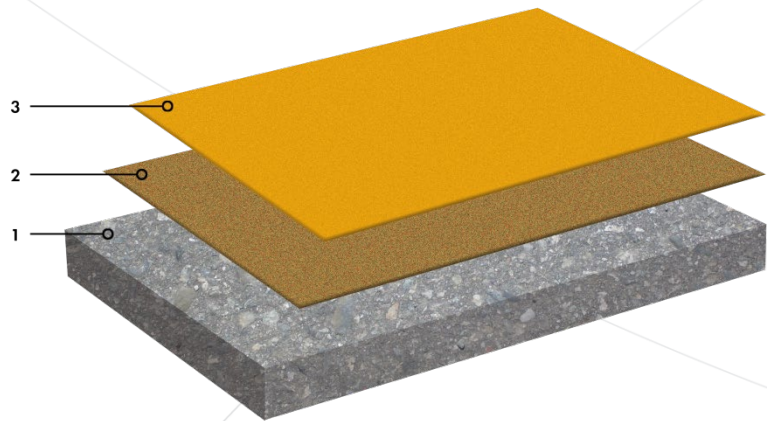

1. Pre-treat surface correctly

2. Rocapox WD epoxy mortar layer 1:0,5 with fire-dried quartz sand 0,1-0,4 mm (\pm 1 kg/m²/layer) and fully scatter wet layer immediately with fire-dried quartz sand (\pm 3 kg/m²/layer)

3. Rocapox Floor Coating WD-600 (\pm 0,60 kg/m²/layer)

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future