

# System sheet EP-Wear layer base

## Description


Wear and scatter layer based on epoxy for medium and heavy loads.

## Application area's

- Parking garages
- Bridges
- Workshops
- Storage compartments

## Most important properties

- Anti-slip finish
- Mechanical resistant
- For in- and outdoor use
- Sound deadening

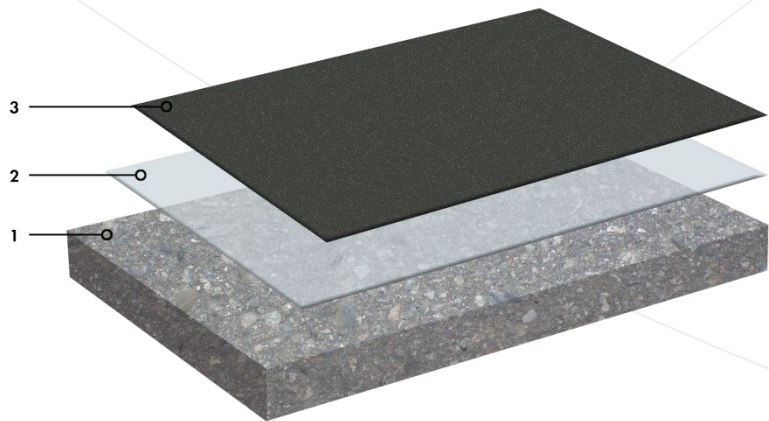

1. **Pre-treat mineral surface correctly**
2. **Rocopox Resin 100 ( $\pm 0,30 \text{ kg/m}^2/\text{layer}$ )**
3. **Rocopox Screed ( $\pm 2 \text{ kg/m}^2/\text{layer}$ ) and scatter wet layer immediately with Amaril (or equal) 1 – 3 mm ( $\pm 8 \text{ kg/m}^2/\text{layer}$ )**

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
www.prokol.nl • info@prokol.nl

**Liquid synthetic materials for a sustainable future**