

# System sheet PA-BBS T

## Description


Waterproofing based on Rocathaan Hotspray with ProFast topcoating.

## Application area's

- Grandstands
- Flooring
- Walkways
- Roofing
- Galleries

## Most important properties

- Seamless
- Crack bridging
- Abrasion resistant
- Elastic

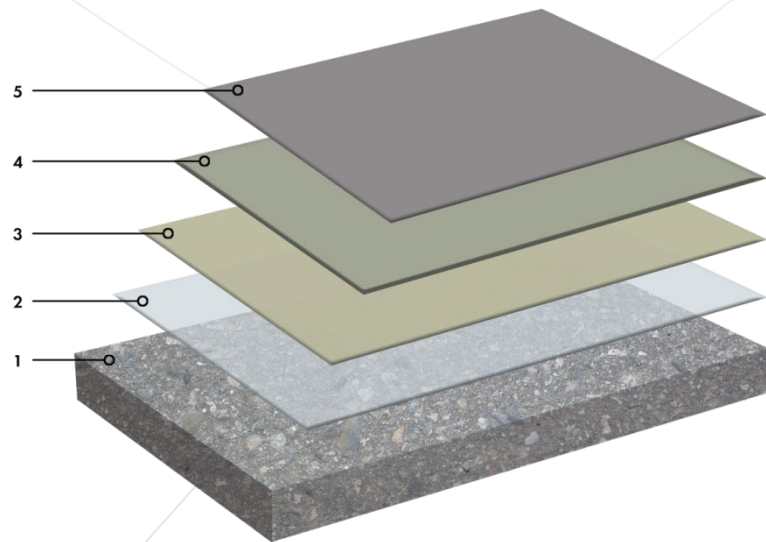

- 1. Pre-treat surface correctly**
- 2. Rocapox Primer 100 ( $\pm 0,30 \text{ kg/m}^2/\text{layer}$ )**
- 3. Rocapox Screed ( $\pm 1 \text{ kg/m}^2/\text{layer}$ )**
- 4. Rocathaan Hotspray PA 136-T ( $\pm 2,5 \text{ kg/m}^2/\text{layer}$ )**
- 5. ProFast Topcoat 70-C ( $\pm 0,15 \text{ kg/m}^2/\text{layer}$ )**
- 6. Optional ProFast Topcoat 70-C ( $\pm 0,15 \text{ kg/m}^2/\text{layer}$ )**

Check before application the datasheets. If necessary, contact your technical advisor.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the application method, roughness and absorbency of the substrate.

The information and consumption per layer are indicative.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
www.prokol.nl • info@prokol.nl

**Liquid synthetic materials for a sustainable future**