

System sheet PA-HBS Plus

Description

Crack-bridging floor finish for heated ramps based on aromatic polyurea with an anti-slip finish.


Application area's

Heated surfaces

- Ramps
- Driveways
- Distribution centers

Most important properties

- Anti-slip ($\pm R14$)
- Waterproof
- Crack-bridging
- Elastic
- Seamless

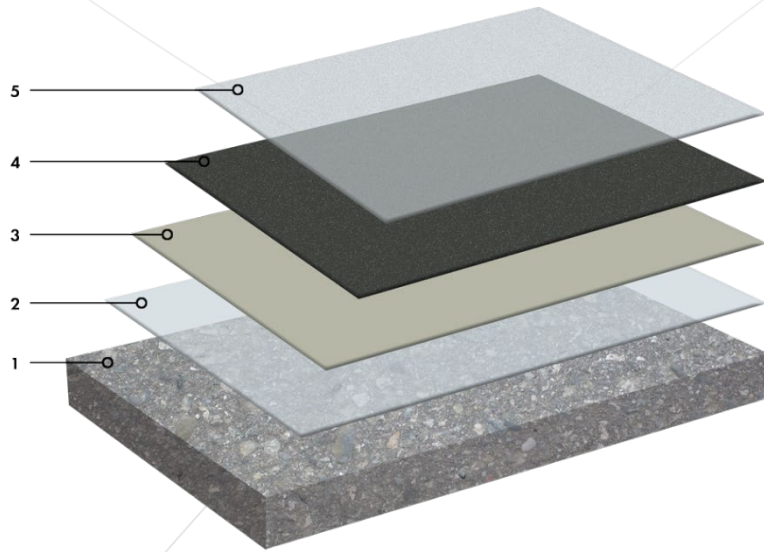

- 1. Pre-treat surface with underfloor heating correctly**
- 2. Rocapox Resin 100 ($\pm 0,30 \text{ kg/m}^2/\text{layer}$)**
- 3. Renopar PD Thix ($\pm 2 \text{ kg/m}^2/\text{layer}$)**
- 4. Rocathaan 300-BA ($\pm 0,80 \text{ kg/m}^2/\text{layer}$) and fully scatter wet layer immediately with emery og $0,3 - 1,2 \text{ mm}$ ($\pm 6 \text{ kg/m}^2/\text{layer}$)**
- 5. Rocapox Floor Coating TR-12 ($\pm 0,40 \text{ kg/m}^2/\text{layer}$)**

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future