

System sheet PA-HS DSN-136 Plus

Description

Crack-bridging wall finish based on aromatic polyurea Hotspray with an aliphatic topcoat.


Application area's

- Walls
- Facades

Most important properties

- Crack-bridging
- Elastic
- Seamless*

* Depending on the type of surface and pre-treatment, panel seams may appear.

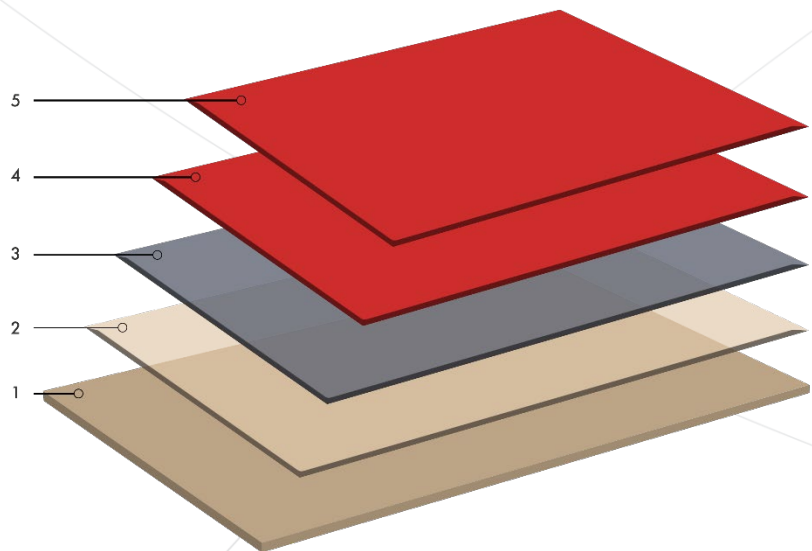

1. Pre-treat surface correctly
2. Rocapox Resin 100 ($\pm 0,30 \text{ kg/m}^2/\text{layer}$)
3. Rocathaan Hotspray PA 136-T ($\pm 2,5 \text{ kg/m}^2/\text{layer}$)
4. First layer of ProFast Topcoat 70-C in the desired colour ($\pm 0,20 \text{ kg/m}^2/\text{layer}$)
5. Second layer of ProFast Topcoat 70-C in the desired colour ($\pm 0,15 \text{ kg/m}^2/\text{layer}$)

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future