

# System sheet PA-HS DSN-660-S

## Description


For finishing EPS, XPS and other hard insulation materials.

## Application area's

- Molded parts/forms
- Advertising objects
- stands
- Works of art

## Most important properties

- Sandable
- Solvent-free
- Impact resistant

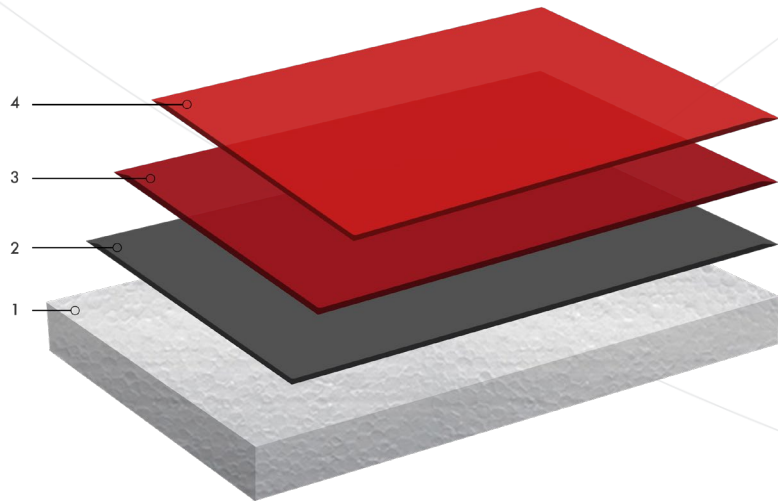

- 1. Insulating material with the right compression and density**
- 2. Rocathaan Hotspray PU 660-S (2 – 3 kg/m<sup>2</sup>/layer)**
- 3. First layer of ProFast Topcoat 70-C in the desired colour (± 0,20 kg/m<sup>2</sup>/layer)**
- 4. Second layer of ProFast Topcoat 70-C in the desired colour (± 0,15 kg/m<sup>2</sup>/layer)**

*If desired, another brand and type of topcoating may be used. Check whether this goes together with the previous layer.*

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
www.prokol.nl • info@prokol.nl

**Liquid synthetic materials for a sustainable future**