

# System sheet PA-HS Traffic Basis

## Description


Crack-bridging hot spray flooring system based on aromatic polyurea with a sprayed anti-slip structure.

## Application area's

- Parking roofs
- Roof gardens

## Most important properties

- Crack-bridging
- Elastic
- Seamless
- Anti-slip

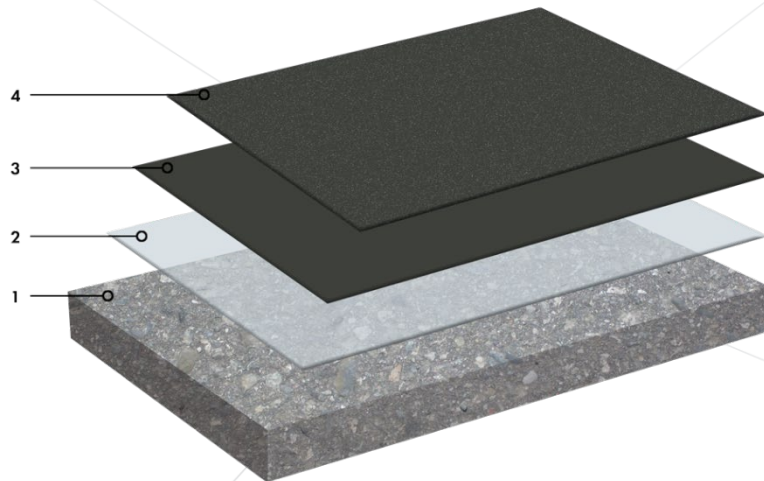

- 1. Pre-treat surface correctly**
- 2. Rocapox Primer GV-M ( $\pm 0,30 \text{ kg/m}^2/\text{layer}$ )**
- 3. Rocathaan Hot spray PA 136-T ( $\pm 3 \text{ kg/m}^2/\text{layer}$ )**
- 4. A sprayed anti-slip structure ( $\pm 0,50 \text{ kg/m}^2/\text{layer}$ )**

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
www.prokol.nl • info@prokol.nl

**Liquid synthetic materials for a sustainable future**