

System sheet PA-HS Traffic Plus

Description


Crack-bridging hotspray flooring system based on aromatic polyurea with a rough anti-slip structure.

Application area's

- Parking roofs
- Garden roofs
- Bridges
- viaducts

Most important properties

- Crack-bridging
- Elastic
- Seamless
- Anti-slip

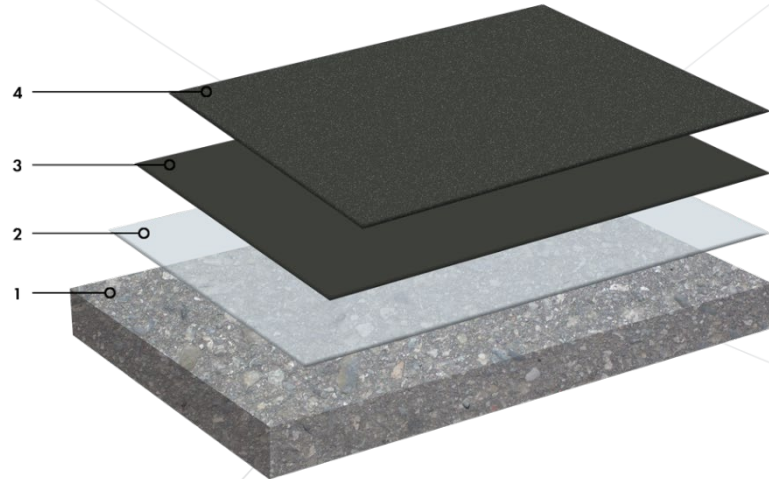

1. Pre-treat surface correctly
2. Rocapox Resin 100 ($\pm 0,30 \text{ kg/m}^2/\text{layer}$)
3. Rocathaan Hotspray PA 136-T ($\pm 2,5 \text{ kg/m}^2/\text{layer}$)
4. Rocathaan Hotspray PA 45-BA ($\pm 1,5 \text{ kg/m}^2/\text{layer}$) and fully scatter wet layer immediately with Emery og 1 – 3 mm ($\pm 8 \text{ kg/m}^2/\text{layer}$)

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future