

System sheet PA-HS Traffic Plus UP2

Description


Crack-bridging flooring system based on aromatic polyurea with an anti-slip and uv-resistant topcoat.

Application area's

- Parking roofs
- Galleries
- Walkways
- Balconies
- Terraces

Most important properties

- CE inspected in accordance to EN 1504-2
- Waterproof
- Crack-bridging
- Elastic
- Seamless
- Anti-slip
- Decorative

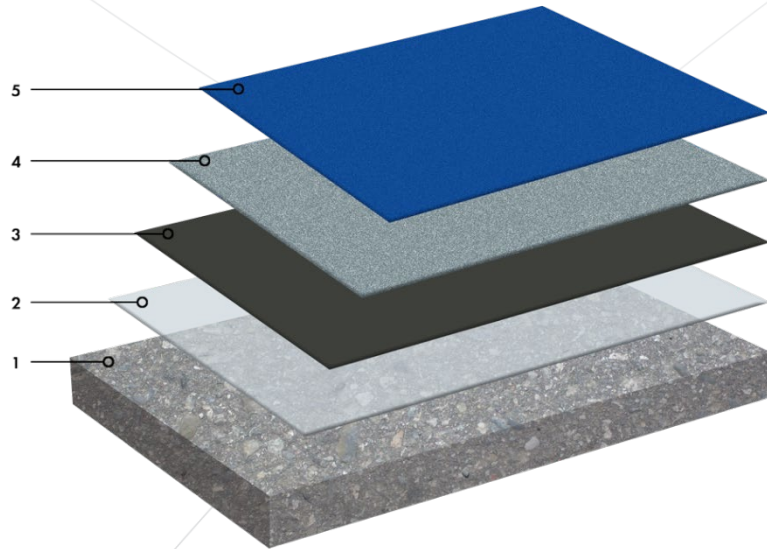

1. **Pre-treat surface correctly**
2. **Rocapox Resin 100 ($\pm 0,30 \text{ kg/m}^2/\text{layer}$)**
3. **Rocathaan Hotspray PA 136-T CE EN 1504-2 ($\pm 2,5 \text{ kg/m}^2/\text{layer}$)**
4. **Rocathaan PU 300-BA ($\pm 1,2 \text{ kg/m}^2/\text{layer}$) and fully scatter wet layer immediately with quartz sand 0,7 – 1,2 mm ($\pm 6 \text{ kg/m}^2/\text{layer}$)**
5. **ProFast Topcoat UP2 ($\pm 0,35 \text{ kg/m}^2/\text{layer}$)**

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future