

System sheet PA-PD Plus

Description


Crack-bridging flooring system based on aromatic polyurea with an anti-slip finish.

Application area's

- Parking roofs
- Galleries
- Walkways
- Balconies
- Terraces

Most important properties

- Waterproof
- Crack-bridging
- Elastic
- Seamless
- Anti-slip
- Decorative

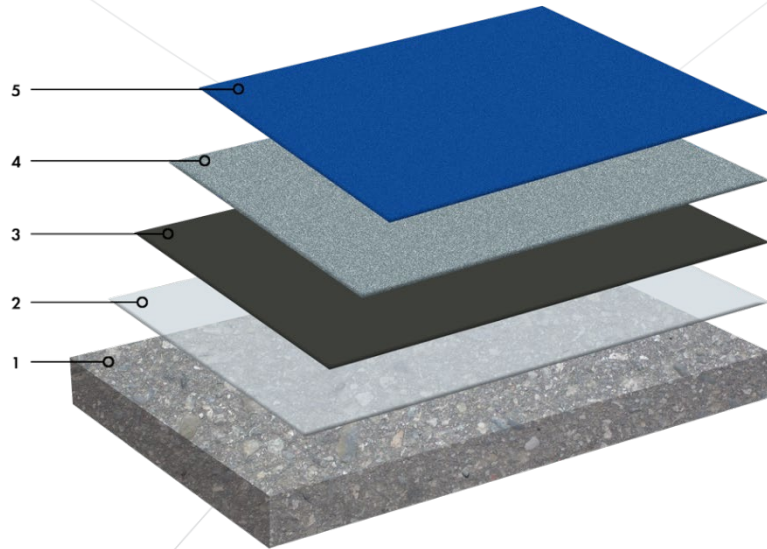

- 1. Pre-treat surface correctly**
- 2. Rocapox Resin 100 ($\pm 0,30 \text{ kg/m}^2/\text{layer}$)**
- 3. Renopar PD ($\pm 3 \text{ kg/m}^2/\text{layer}$)**
- 4. Rocathaan PU 300-BA ($\pm 1,2 \text{ kg/m}^2/\text{layer}$) and fully scatter wet layer immediately with quartz sand 0,7 – 1,2 mm ($\pm 6 \text{ kg/m}^2/\text{layer}$)**
- 5. Rocathaan Topcoat UP2 ($\pm 0,35 \text{ kg/m}^2/\text{layer}$)
Apply two layers**

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future