

# System sheet PRF-VCB KW

## Description


Decorative middle anti-slip flooring system based on polyurea coatings for mineral substrates.

## Application area's

- Balconies
- Walkways
- Terraces
- Offices
- Canteens
- Storage rooms

## Most important properties

- Quick drying time ( $\pm 2$  hours)
- More abrasion- and scratch resistance compared to polyurethane and epoxy
- Mechanical resistance
- For in- and outdoor use
- Very good clean ability
- UV-resistant

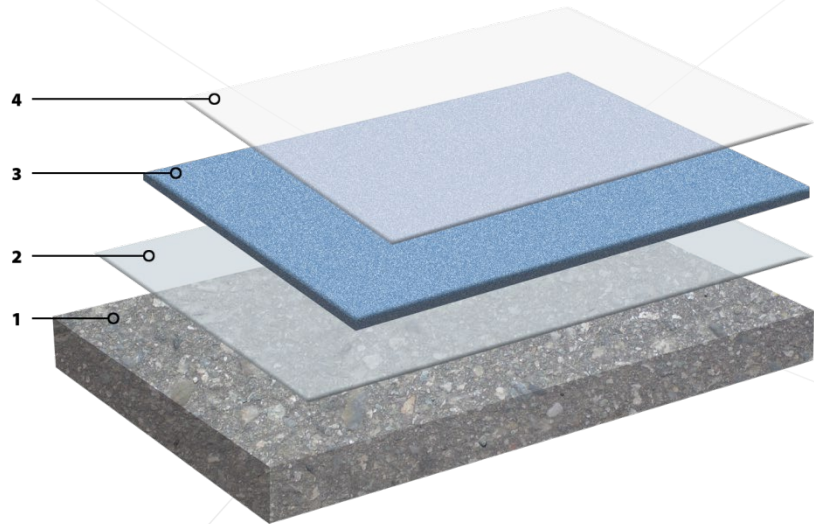

1. **Pre-treat mineral surface correctly**
2. **ProFast Primer RW ( $\pm 0,25 \text{ kg/m}^2/\text{layer}$ )**
3. **ProFast Flooring ( $\pm 0,30 \text{ kg/m}^2/\text{layer}$ ) and scatter wet layer immediately with fire-dried quartz sand  $0,3 - 0,8 \text{ mm}$**
4. **ProFast Multi-TR ( $\pm 0,25 \text{ kg/m}^2/\text{layer}$ )**

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
www.prokol.com • info@prokol.com

**Liquid synthetic materials for a sustainable future**