

# System sheet **PRF-VCZ Base**

## Description


Flooring system for medium load based on polyurea coatings (fast and UV resistant) for sand cement surfaces.

## Application area's

- Balconies
- Walkways
- Terraces
- Offices
- Canteens
- Storage rooms

## Most important properties

- Quick drying time ( $\pm 2$  hours)
- More abrasion- and scratch resistance compared to polyurethane and epoxy
- Mechanical resistance
- For in- and outdoor use
- Very good cleanability
- UV resistance

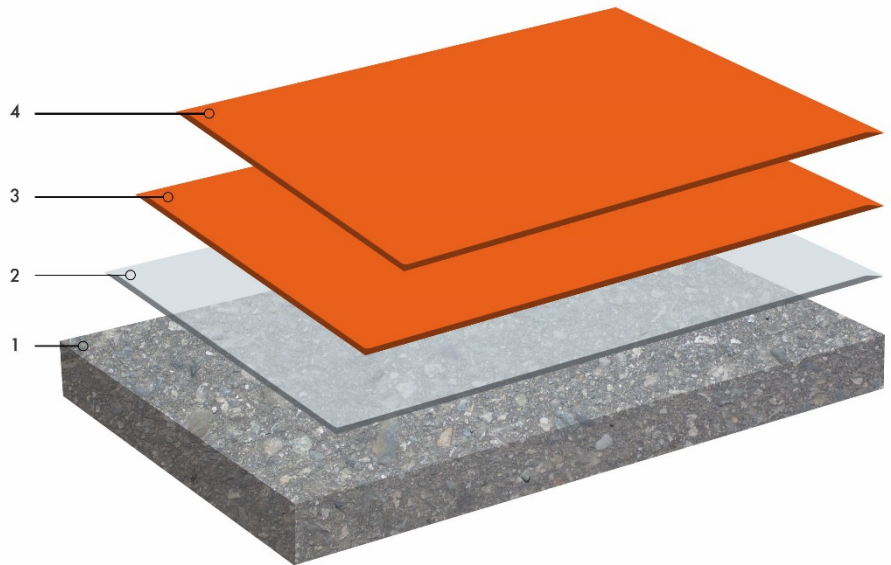

- 1. Pre-treat sand cement surface correctly**
- 2. ProFast (Screed-) Primer / N ( $\pm 0,40 \text{ kg/m}^2/\text{layer}$ )**
- 3. ProFast Flooring ( $\pm 0,35 \text{ kg/m}^2/\text{layer}$ )**
- 4. ProFast Flooring ( $\pm 0,30 \text{ kg/m}^2/\text{layer}$ )**

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
www.prokol.com • info@prokol.com

**Liquid synthetic materials for a sustainable future**