

# System sheet PU-BCA

## Description


Tough-hard anti-slip flooring system based on polyurethane with a wear resistant topcoat.

## Application area's

- Parking garages
- Carwashes
- Galleries
- Walkways
- Terraces
- Balconies

## Most important properties

- Anti-slip ( $\pm$  R11 /12)
- Tough-hard
- Seamless
- Liquid proof

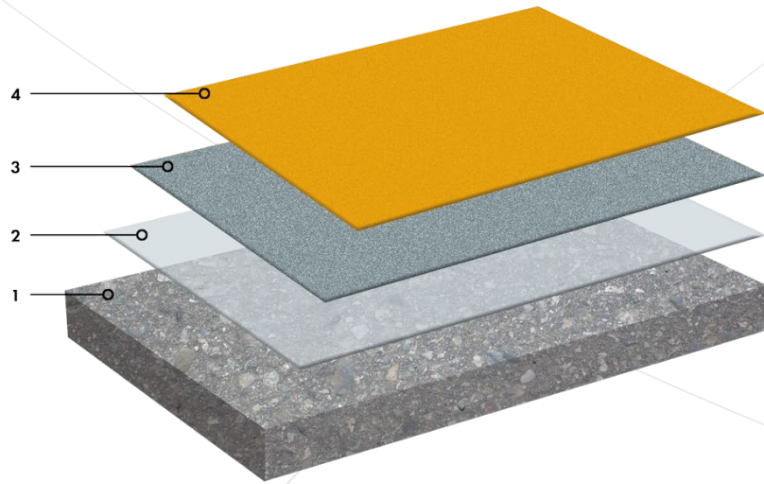

1. Pre-treat surface correctly
2. Rocapox Resin 100 ( $\pm$  0,30 kg/m<sup>2</sup>/layer)
3. Rocathaan PU-300 BA, coloured ( $\pm$  0,80 kg/m<sup>2</sup>/layer) and fully scatter wet layer immediately with quartz sand 0,3 - 0,8 mm ( $\pm$  3 kg/m<sup>2</sup>/layer)
4. Rocathaan Topcoat UP2 ( $\pm$  0,35 kg/m<sup>2</sup>/layer)  
Apply two layers

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
www.prokol.nl • info@prokol.nl

**Liquid synthetic materials for a sustainable future**