

System sheet PU-GV 100 Plus

Description


Self-leveling flooring system based on solvent-free, aromatic polyurethane with a wear resistant, mat or satin topcoat.

Application area's

- Cleanrooms
- Stores
- Schools
- Public buildings
- Restaurants
- Archive rooms

Most important properties

- Shore \pm D53
- Decorative
- Tough-elastic
- Seamless
- Liquid proof
- Hygienic
-

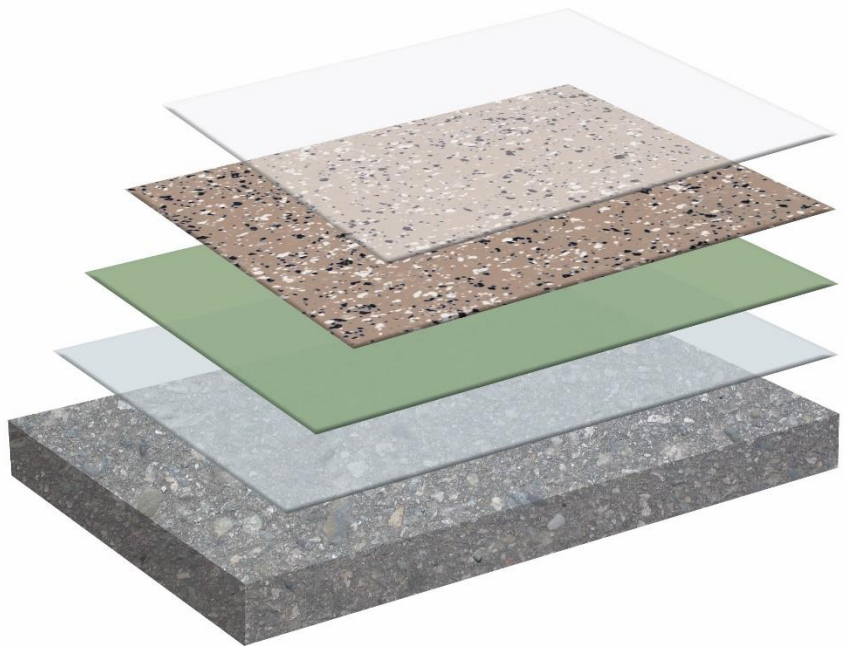

1. **Pre-treat surface correctly**
2. **Primer based on the primer table and/or professional advise**
3. **Rocathaan Screed ($\pm 1 \text{ kg/m}^2/\text{layer}$)**
4. **Rocathaan Flooring SL-100 ($\pm 3 \text{ kg/m}^2/\text{layer}$)**
Scattering layer for decorative purposes is possible
5. **Rocathaan Topcoat 20 mat/satin ($\pm 0,10 \text{ kg/m}^2/\text{layer}$)**
Apply two layers

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.com • info@prokol.com

Liquid synthetic materials for a sustainable future