

System sheet **PU-GV 150 BL Plus**

Description


Self-leveling flooring system based on solvent-free, aliphatic polyurethane with a wear resistant, mat or satin topcoat.

Application area's

- Cleanrooms
- Stores
- Schools
- Public buildings
- Restaurants
- Archive rooms

Most important properties

- Shore \pm D40
- Decorative
- Elastic
- Seamless
- Liquid proof
- Hygienic
- Sound proofing

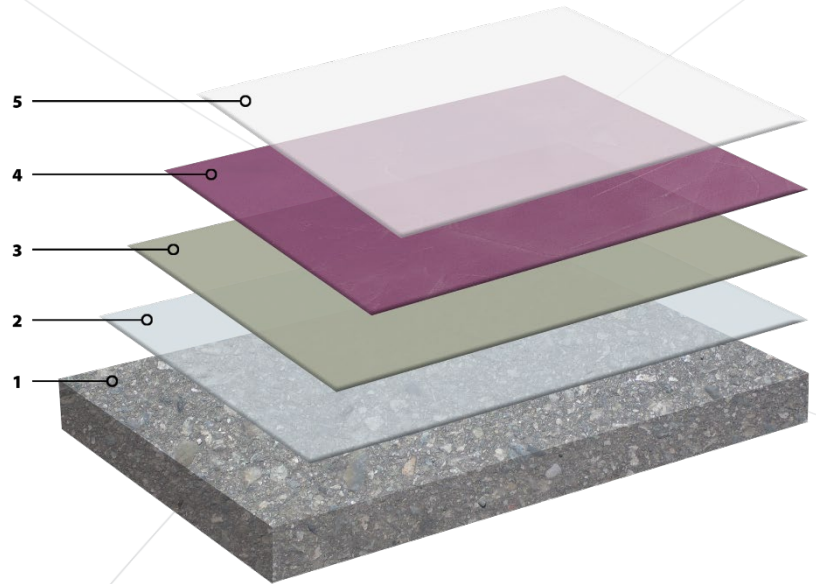

- 1. Pre-treat surface correctly**
- 2. Rocapox Resin 100 ($\pm 0,30 \text{ kg/m}^2/\text{layer}$)**
- 3. Rocathaan Screed ($\pm 1 \text{ kg/m}^2/\text{layer}$)**
- 4. Rocathaan Flooring SL-150 ($\pm 3 \text{ kg/m}^2/\text{layer}$)
Concrete look with two mixed colours**
- 5. Rocathaan Topcoat 20 mat/satin ($\pm 0,10 \text{ kg/m}^2/\text{layer}$)
Apply two layers**

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21
www.prokol.nl • info@prokol.nl

Liquid synthetic materials for a sustainable future