

# System sheet PU-GV 150 Plus

## Description


Self-leveling flooring system based on solvent-free, aliphatic polyurethane with a wear resistant, mat or satin topcoat.

## Application area's

- Cleanrooms
- Stores
- Schools
- Public buildings
- Restaurants
- Archive rooms

## Most important properties

- Shore  $\pm$ D40
- Decorative
- Elastic
- Seamless
- Liquid proof
- Hygienic
- Sound proofing

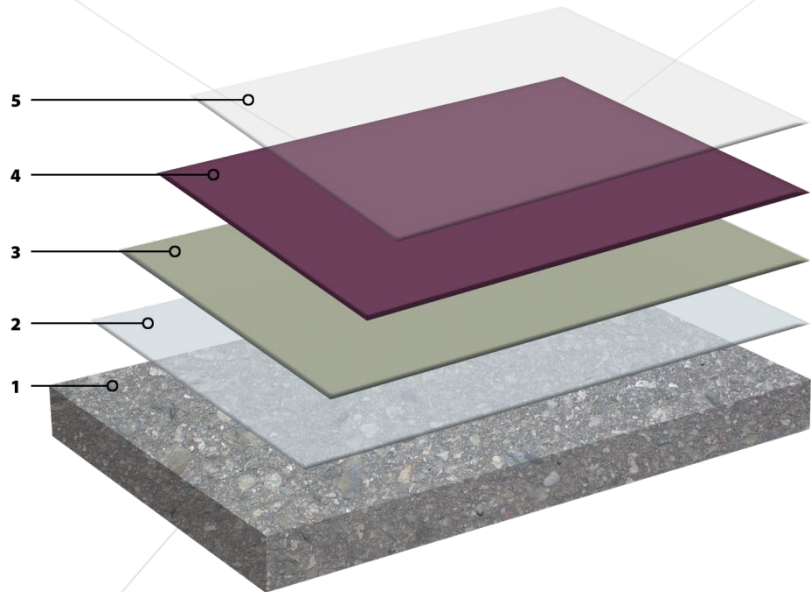

- 1. Pre-treat surface correctly**
- 2. Rocapox Resin 100 ( $\pm$  0,30 kg/m<sup>2</sup>/layer)**
- 3. Rocathaan Screed ( $\pm$  1 kg/m<sup>2</sup>/layer)**
- 4. Rocathaan Flooring SL-150 ( $\pm$  3 kg/m<sup>2</sup>/layer)  
Scattering layer for decorative purposes is possible**
- 5. Rocathaan Topcoat 20 mat/satin ( $\pm$  0,10 kg/m<sup>2</sup>/layer)**

Before applying this system, consult the relevant product and information sheets and, if necessary, contact your technical adviser.

The stated consumption figures are indicative and based on smooth, flat surfaces. The actual consumption depends on the method, roughness and suction of the substrate.

No rights can be derived from the information on this sheet.



Tel. +31 (0)85 78 200 20 • Fax. +31 (0)85 78 200 21  
www.prokol.nl • info@prokol.nl

**Liquid synthetic materials for a sustainable future**